



## TRI-PROOF Light 9-360°

LED 15W / 30W / 45W **100 / 120 lm/W**

### Características mecánicas Mechanical specifications



**Material del cuerpo:** PC

**Housing material:** Milky PC

**Material del difusor:** PMMA 304

**Diffuser material:** PMMA 304

**Material de los clips:** acero inoxidable

**Clip material:** stainless steel

**Protección:** IP40 / IK08

**Protection**


**Tamaño:** Ø75/100\*552 mm (15W)

**Size** Ø75/100\*1152 mm (30W)

Ø75/100\*1452 mm (45W)

**Montaje:**

**Mount:**

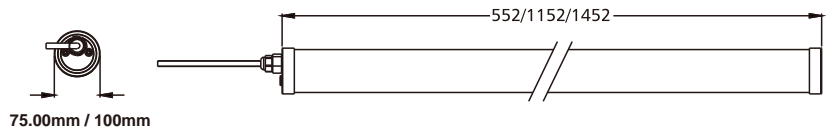

### Características ópticas Optical specifications

**LED:** SMD 2835

LED PREMIUM (OPTIONAL)

**Potencias:** 15W / 30W / 45W

**Powers:**

**Flujo luminoso:** de 2000lm a 4500lm

**Luminous flux:** from 2000lm to 4500lm

**Eficacia:** 100 lm/W / 120 lm/W

**Efficacy**

**IRC (CRI):** >85

**Temperatura de color:** 2700K - 6500K

**Color temperature**

**Ángulo de apertura:** 360°


**Beam angle**

**Temperatura de trabajo:** -20°C +40°C

**Work temperature**

**Vida útil:** Ta 40° L70 / 54.000 h (LED PREMIUM)

**Lifespan**

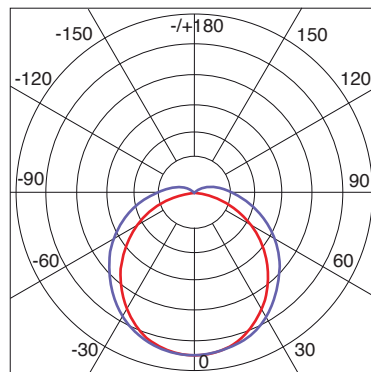

UNIT: cd  
— c0 / c180  
— c90 / c270

### Características eléctricas Electrical specifications

**Driver:** Integrado

**Driver:** Integrated

**Voltaje de entrada:** 200-240V AC

**Input voltage**

**Frecuencia:** 50/60 Hz

**Frecuency**

**Factor de potencia:** 0.9

**Power factor**

**Dimable:** 1-10V, DALI , opcional

**Dimmable:** 1-10V, DALI, optional

**Aplicaciones:** Oficinas, Hospital, Centros Comerciales, Restaurantes, Cafe

**Applications:** Office, Hospital, Shopping Center  
Restaurants, coffe