

TRI-PROOF Light 9P

LED 30W / 60W / 80W **140 / 170 lm/W**



Características mecánicas Mechanical specifications



Material del cuerpo: PC

Housing material: Milky PC

Material del difusor: PMMA 304

Diffuser material: PMMA 304

Material de los clips: acero inoxidable

Clip material: stainless steel

Protección: IP66, IP69K / IK08

Protection



Tamaño: Ø105*552 mm (30W)

Size Ø105*1152 mm (60W)

Ø105*1452 mm (80W)

Montaje:

Mount:

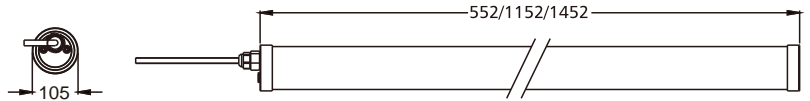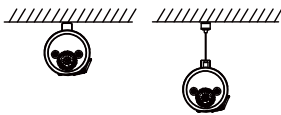

Características ópticas Optical specifications

LED: SMD 2835

LED PREMIUM (OPTIONAL)

Potencias: 30W / 60W / 80W

Powers:

Flujo luminoso: de 4200lm a 13600lm

Luminous flux: from 4200lm to 13600lm

Eficacia: 140 lm/W / 170 lm/W

Efficacy

IRC (CRI): >85

Temperatura de color: 2700K - 6500K

Color temperature

Ángulo de apertura: 120°


Beam angle

Temperatura de trabajo: -20°C +40°C

Work temperature

Vida útil: Ta 40° L70 / 54.000 h (LED PREMIUM)

Lifespan

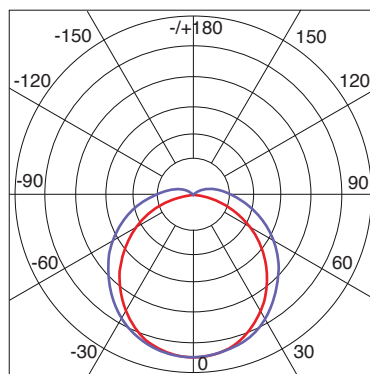

Características eléctricas Electrical specifications

Driver: Integrado

Driver: Integrated

Voltaje de entrada: 200-240V AC

Input voltage 100-277V AC

Frecuencia: 50/60 Hz

Frecuency

Factor de potencia: 0.9

Power factor

Dimable: 1-10V, DALI , opcional

Dimmable: 1-10V, DALI, optional

Aplicaciones: Estacionamientos, Estaciones de tren, Tuneles, Puertos, Granjas, lavado de autos

Applications: Car Parks, Railway Station, Tunnels, Ports, Farm lightings, Car Washing.